



Classic A-6F (original) Sunflower/Mixed Seed Feeder

For easy filling, slide the metal cap evenly up the bail wire and it will fall to the side.

All Droll Yankees Feeders can be disassembled for easy cleaning or replacing parts.


Cleaning: Please for the sake of the birds, keep your feeders clean! Dirty feeders can harm the birds. Use a mild soap and water solution and a soft bristle brush for thorough and simple cleaning. Dry completely before filling with seed.

Disassemble

1. Remove the top cap by cutting off or straightening with pliers, the ends of the bail wire. Pull bail rod out from the side of tube.
2. With feeder in a horizontal position, push downward against each perch rod on a flat surface until it is pushed further through to the opposite side and remove. Disassemble each pair of ports which are held together with a nut and a Phillips screw.
3. Remove the 2 base screws which will release base. Depending on the age of your feeder, there may be a clear plastic baffle, or a red plug in the threaded hole of base.

Assemble

1. Port Assembly: First, place Phillips screws in their holes on half of the ports. While tube is in a horizontal position, hold nut in place on port with finger while placing port onto tube. Take a port with Phillips screw and place opposite of the port with nut and tighten Phillips screw. Make certain that the hole in bottom of port is aligned with the perch rod hole in tube. Do not completely tighten Phillips screws until perch rods are inserted into feeder.
2. Install the baffle on the base. Place tube on the base aligning small holes on both the base and the tube.
3. Perch Rod Installation: **Note: For easier insertion, place perch rods in freezer for 20-30 minutes.**
 - a. Hold a perch rod in an upright position on a carpeted area or workbench. With the feeder in a horizontal position, line up the perch rod with the perch rod hole in the feeder. Push the feeder down onto the perch rod, allowing the rod to push up through the tube.
 - b. Align the partially inserted rod with the exit hole and push until the rod extends equally on both sides of the tube.
4. Insert bail rod into holes at top of tube. Place top cap on feeder and insert bail wire through the holes in the top cap and bail rod. Use pliers to bend the ends of the bail wire to 90° angles.

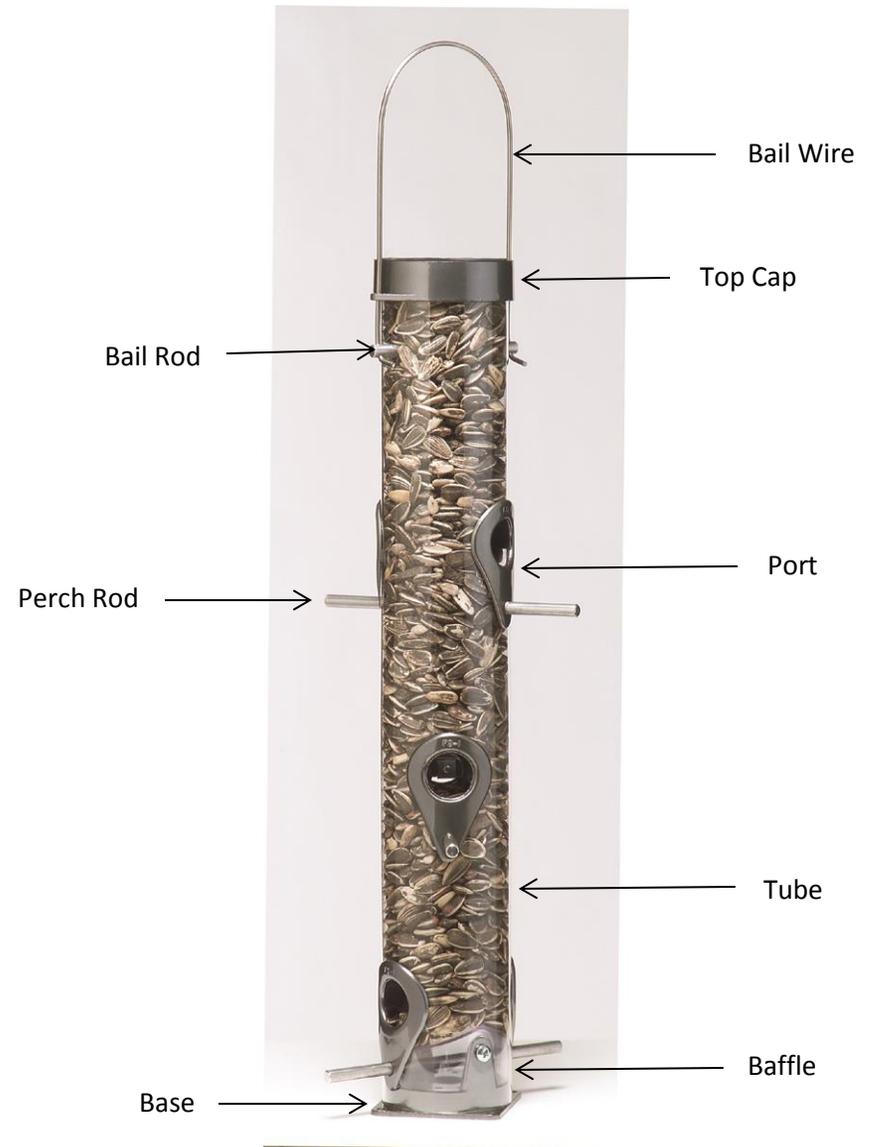

drollyankees.com • Customer Service: drollbird@drollyankees.com
(860) 779-8980 or (800) 352-9164

08/26/15

Classic A-6F (original) Sunflower/Mixed Seed feeder 0815