



Classic A-6F (original) Sunflower Feeder

Droll Yankees feeders can be disassembled for easy cleaning and part replacement.


Cleaning: Please, for the sake of the birds, keep your feeders clean! Dirty feeders can harm the birds. Use a mild soap & water solution and a soft brush for thorough, simple cleaning. Dry completely before filling with seed.

Disassemble

1. Remove the bail wire by cutting the 90° bend on each end of the bail wire with wire cutters, or straightening with pliers. Pull the bail wire out from the bail rod and remove the top cap.
2. With the feeder in a horizontal position, push the feeder down against a perch rod on a flat surface until the perch rod has been pushed further through the opposite side of the tube, and remove.
3. Disassemble each pair of ports which are held together with a nut and a Phillips screw, keeping the Phillips screw on the port for reassembly.
4. Remove the two base screws which will release the base. Depending on the age of your feeder, there may be a clear plastic baffle above the base, or a red plug in the threaded hole of the base.

Assemble

1. **Port Assembly:** While the tube is in a horizontal position, hold a nut in place on a port using your finger while placing the port on the tube. The nut must be held on the port until secured by the Phillips screw. Take a port with a Phillips screw and place opposite of the port with the nut and tighten the Phillips screw. Make certain that the small hole in the port is aligned with the perch rod hole in the tube. Do not completely tighten the Phillips screw until the perch rod has been installed through the ports.
2. Install the baffle on the base. Place the feeder on the base aligning the small holes on both the base and the tube and replace the two base screws.
3. **Perch Rod Installation - Note: For easier insertion, place the perch rods in the freezer for 20-30 minutes.**
 - a. Hold a perch rod in an upright position on a flat surface. With the feeder in a horizontal position, line up the perch rod with the perch rod hole in the port. Push the feeder down onto the perch rod, allowing the perch rod to push up through the tube.
 - b. Align the partially inserted perch rod with the exit hole and push down on the feeder until the perch rod extends equally on both sides of the tube.
4. Insert the bail rod into both holes at top of the tube. Place the top cap on the feeder and insert the bail wire through the holes in the top cap and the bail rod. Use pliers to bend the ends of the bail wire to a 90° angle.

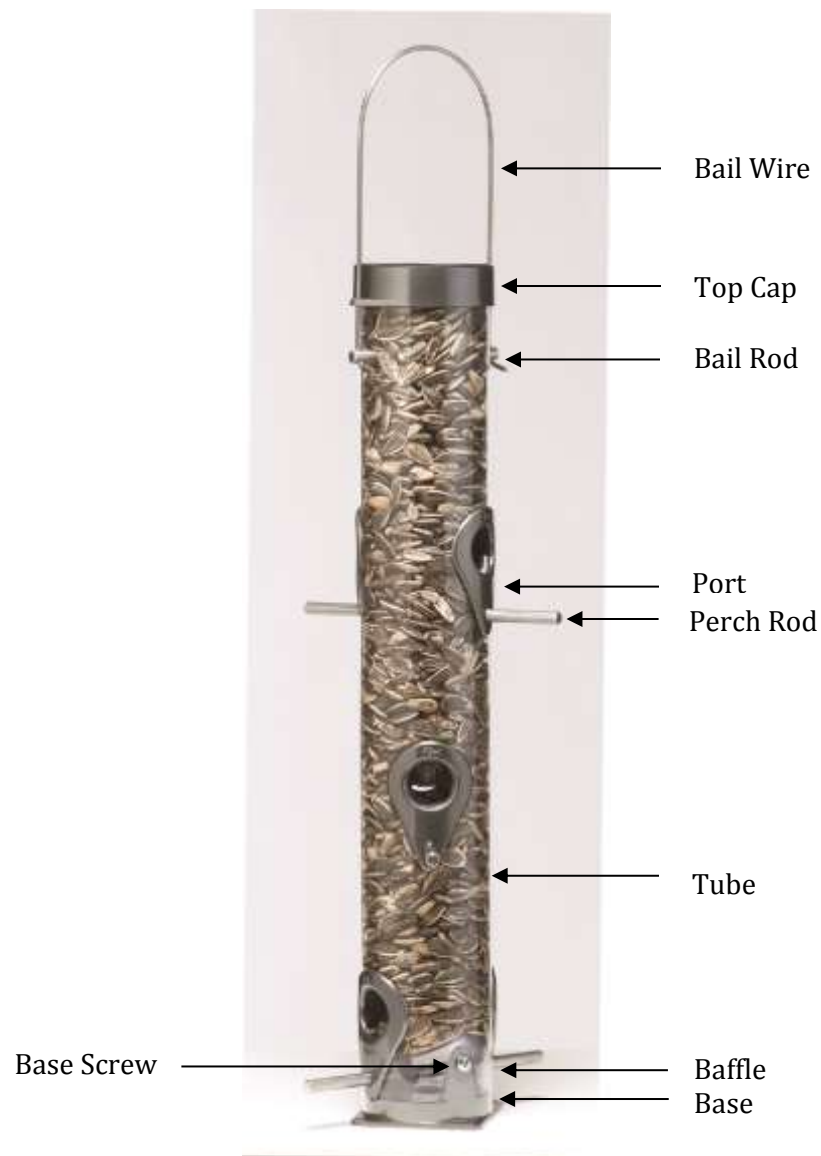

Droll Yankees Inc. • www.drollyankees.com
Customer Service: drollbird@drollyankees.com
(860) 779-8980 or (800) 352-9164