



## Classic A-6F (re-introduced) Sunflower Feeder

Droll Yankees feeders can be disassembled for easy cleaning and part replacement.


**Cleaning:** Please, for the sake of the birds, keep your feeders **clean!** Dirty feeders can harm the birds. Use a mild soap & water solution and a soft brush for thorough, simple cleaning. Dry completely before filling with seed.

### Disassemble

1. Remove the top cap by sliding the top cap halfway up the bail wire which will allow the top cap with bail wire to fall to the side. Gently pull each end of the bail wire out of the bail rod.
2. Squeeze the tube, slightly oblong in shape, horizontal with the bail rod, and reach inside the tube and remove the bail rod.
3. With the feeder in a horizontal position, push the feeder down against a perch rod on a flat surface until the perch rod has been pushed further through the opposite side of the tube, and remove.  
**Note: Removal of the bottom perch rod will release the base and the baffle.**
4. Disassemble each pair of ports which are held together with a nut and a Phillips screw, keeping the Phillips screw on the port for reassembly.

### Assemble

1. Port Assembly: While the tube is in a horizontal position, hold a nut in place on a port using your finger while placing the port on the tube. Take a port with a Phillips screw and place opposite of the port with the nut and tighten the Phillips screw. Make certain that the small hole in the port is aligned with the perch rod hole in the tube. Do not completely tighten the Phillips screw until the perch rod is inserted equally through the paired ports.
2. Install the baffle on the base. Place the base on the feeder aligning the perch rod holes in the lower ports with the holes in the base. Attach the base by inserting the bottom perch rod.
3. Perch Rod Installation - **Note: For easier insertion, place the perch rods in the freezer for 20-30 minutes.**
  - a. Hold a perch rod in an upright position on a flat surface. With the feeder in a horizontal position, line up the perch rod with the perch rod hole in the port. Push the feeder down onto the perch rod, allowing the perch rod to push up through the tube.
  - b. Align the partially inserted perch rod with the exit hole and push down on the feeder until the perch rod extends equally on both sides of the tube.
4. Install the bail rod by squeezing the tube, slightly oblong in shape, horizontal with both holes which accepts the bail rod and insert the bail rod into the holes in the tube.
5. Replace the top cap by inserting each end of the bail wire into the bail rod and slide the top cap down into place on the tube.

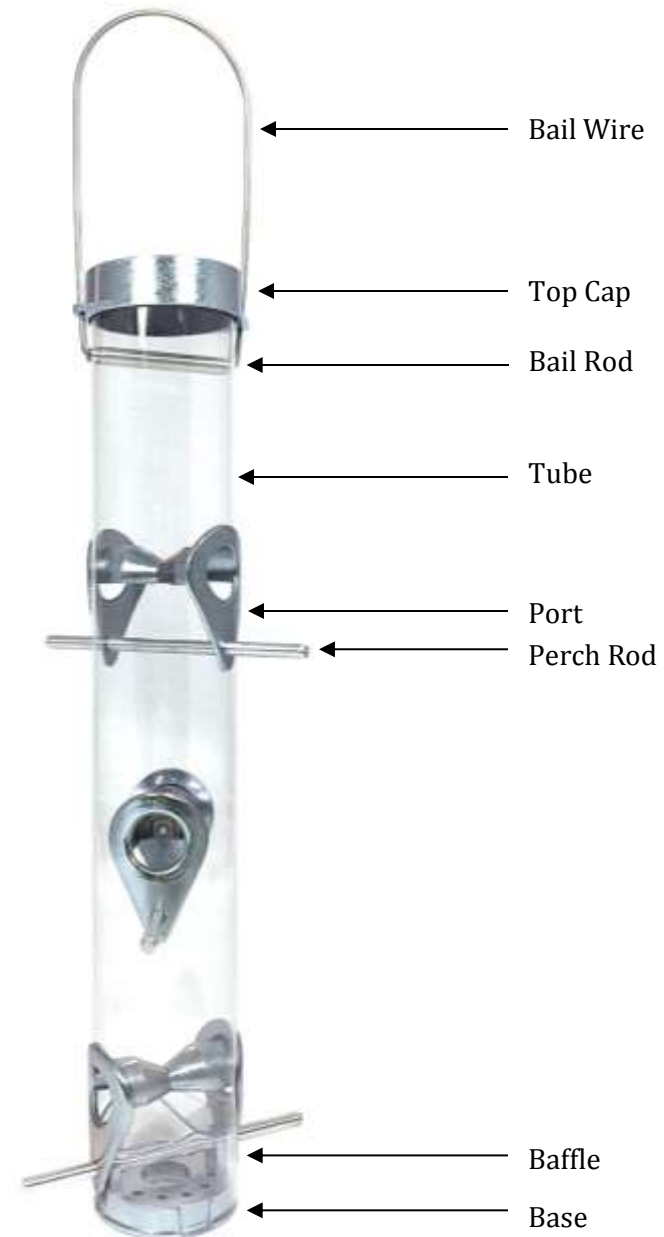

[www.drollyankees.com](http://www.drollyankees.com) • Customer Service: [drollbird@drollyankees.com](mailto:drollbird@drollyankees.com)  
(860) 779-8980 or (800) 352-9164