



Ring Pull Sunflower & Nyjer Feeder

Droll Yankees feeders can be disassembled for easy cleaning and part replacement.

Cleaning: Please for the sake of the birds, keep your feeders clean! Dirty feeders can harm the birds. Use a mild soap & water solution and a soft brush for thorough, simple cleaning. Dry completely before filling with seed.


Disassemble

1. Remove the top cap by sliding the top cap halfway up the bail wire and the top cap with bail wire will fall to the side. Gently pull each end of the bail wire out of the bail rod.
2. Pull the ring pull rod by the ring upward, which will release each pair of ports. Place each pair of ports aside together as each pair of ports will have a male and a female connection. The base will release when the bottom pair of ports are removed.
3. Squeeze the tube, slightly oblong in shape, horizontal with the bail rod, and reach inside the tube and remove the bail rod.

Assemble

1. Install the bail rod by squeezing the tube, slightly oblong in shape, horizontal with both holes which accepts the bail rod and insert the bail rod into the holes in the tube.
2. Place the tube on the base, aligning the small holes in the tube and in the base. With the tube in a vertical position, place the top pair of ports in their designated holes in the tube.
3. Insert the ring pull rod into the hole in the center of the bail rod. Slide the ring pull rod through the top pair of ports while holding the top pair of ports together. Continue until all the ports have been installed. Make certain that the ring pull rod is completely through the bottom pair of ports and the ring on the ring pull rod is against the bail rod.
4. Replace the top cap by inserting each end of the bail wire into the bail rod and slide the top cap down into place on the tube.

RPS15G feeder illustrated

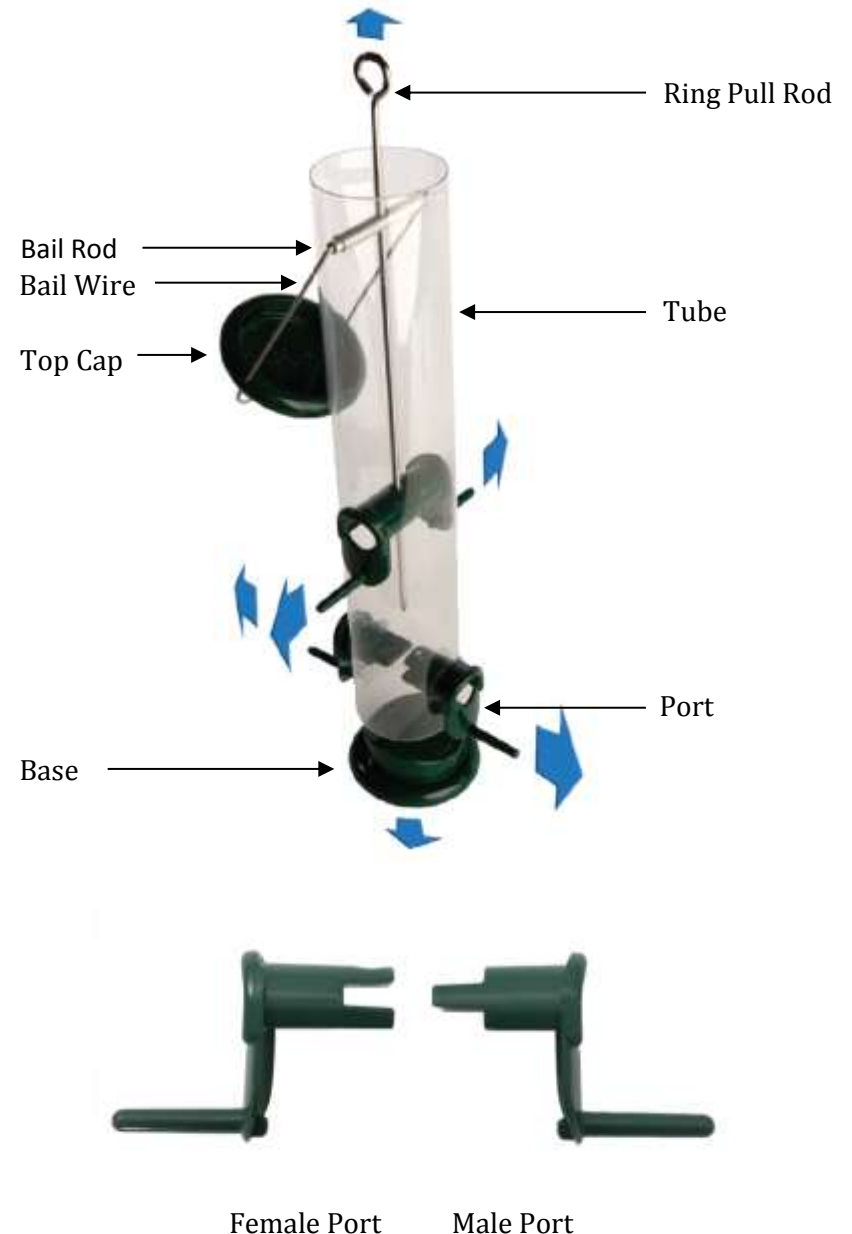

Droll Yankees Inc. • www.drollyankees.com
 Customer Service: drollbird@drollyankees.com
 (860) 779-8980 or (800) 352-9164