



CJM13FSY feeder illustrated

### ***The New Generation Metal Finch Sock Feeder CJM13FSY & CJM13FSS***

Droll Yankees Feeders can be disassembled for easy cleaning and part replacement.


**Cleaning:** *Please for the sake of the birds, keep your feeders clean!* Dirty feeders can harm the birds. Use a mild soap & water solution and a soft brush for thorough, simple cleaning. Dry completely before filling with seed.

#### **Disassemble**

1. Remove the top cap by sliding the top cap halfway up the bail wire which will allow the top cap with bail wire to fall to the side. Gently pull each end of the bail wire out of the bail rod.
2. Squeeze the end of the metal mesh tube, slightly oblong in shape, horizontal with the bail rod, and reach inside the metal mesh tube and remove the bail rod.
3. Remove the base by unscrewing the binding post screw on one side, and sliding out the binding post barrel from the opposite side.

#### **Assemble**

1. Install the bail rod by squeezing the metal mesh tube, slightly oblong in shape, horizontal with both holes which accepts the bail rod and insert the bail rod into the holes in the metal mesh tube. Squeeze the top of the metal mesh tube back into a circular shape.
2. Place the bottom of the metal mesh tube on the base, aligning the small holes in the metal mesh tube with the holes in the base.
3. Slide the binding post barrel through the metal mesh tube into the hole in the base to the opposite side. Screw the binding post screw into the binding post barrel.
4. Replace the top cap by inserting each end of the bail wire into the bail rod and slide the top cap down into place on the wire cage.

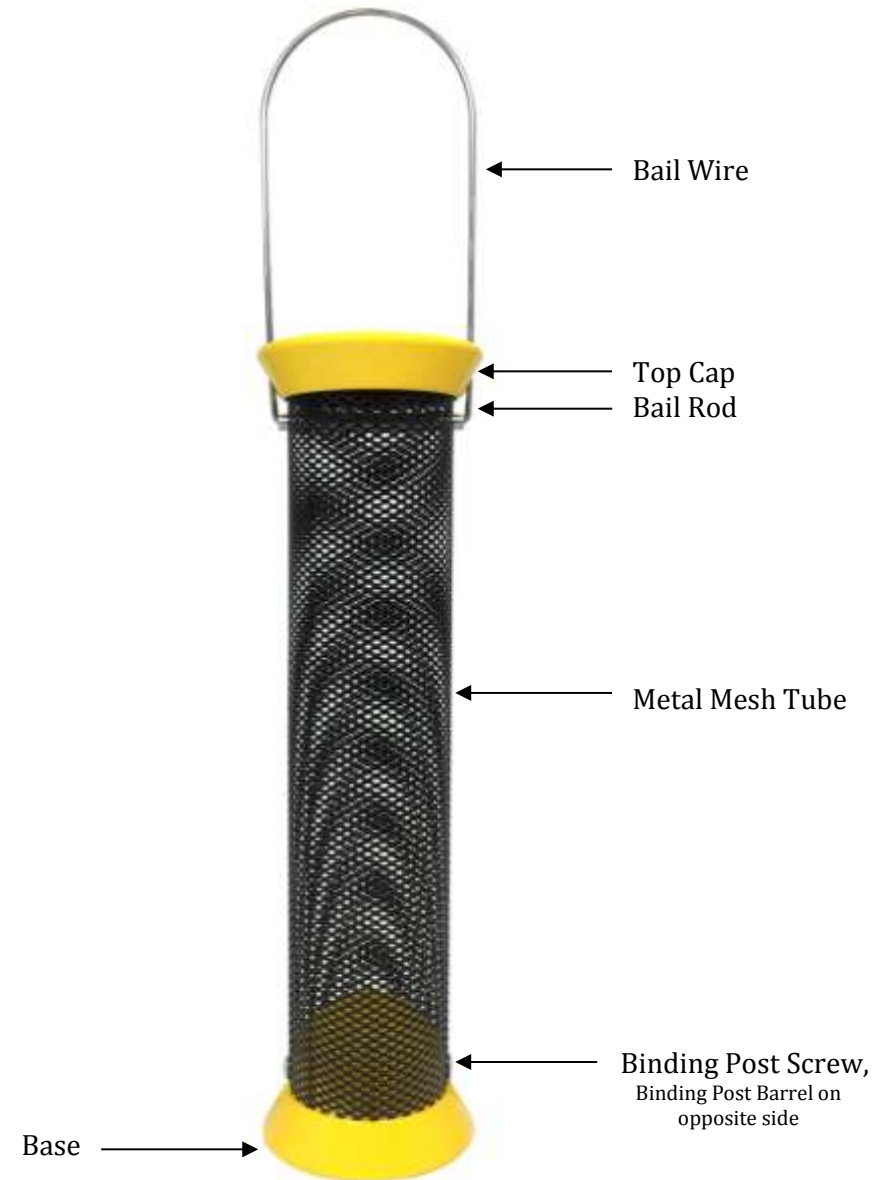

Droll Yankees Inc. • [www.drollyankees.com](http://www.drollyankees.com)  
Customer Service: [drollbird@drollyankees.com](mailto:drollbird@drollyankees.com)  
(860) 779-8980 or (800) 352-9164